# BLUENIX

OPEN DISPLAY CASES

Sleek and durable cooling solution for your food and beverages.











## Stainless steel cabinet construction

Stainless steel interior and exterior (Durable and easy to clean).



## Temperature range between 38°F ~ 44°F

Air guard on rear wall ensures proper air circulation and cooling.

#### **MODEL BOD-60G**

**OPEON DISPLAY CASES** 

Exterior Dimensions (inches/mm)

L 60 1/8" 1526 mm

32 3/4" 831 mm H 80 3/4" 2050 mm

Weight (lbs/kg)

Net Weight 633 lbs 287 kg Ship Weight 679 lbs 307 kg



#### Cabinet construction

- Black or white painted steel exterior and white painted steel interior
- High density foamed in place polyurethane insulation Environmentally safe
- Perforated interior rear wall and top vents for more efficient air circulation colling
- Standard night curtain
- Four (4) 1" height adjustable shelves


#### Refrigeration


- R-404A Refrigent.
- Self-contained system, bottom mounted compressor provides quick and easy maintenance.
- Innovative hot gas frame heating system reduces condensation and increases energy efficiency.
- Front air intake and rear air vent circulation system.

### **Optional Features & Accessories**


Glass side panel

Front view Side view

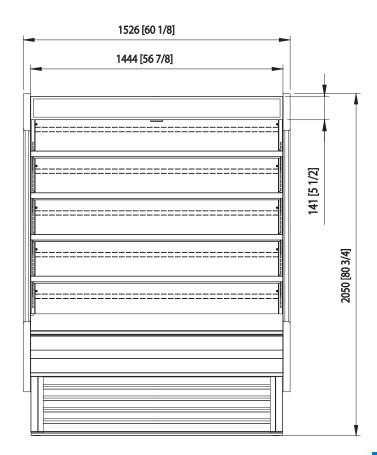

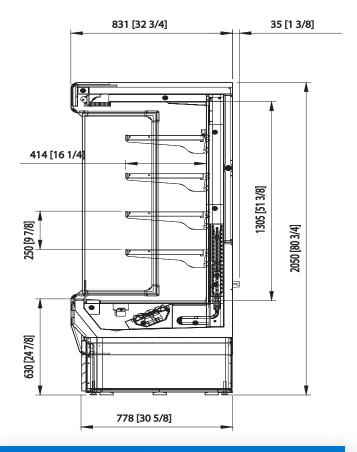

#### Top view

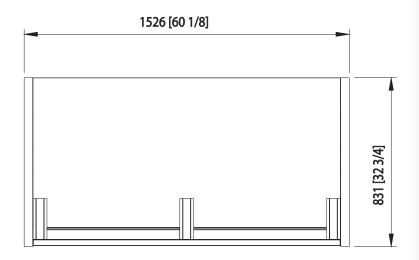

Capacity 33.9 Cu.Ft. **Shelves** 4 Refrigerant R-404 A Temperature 38°F ~ 44°F Range Easy Sliding Condensing Unit Maintenance 9.8 ft long (3m) flexible three Connection wire cord with modeled plug Lighting **LED Interior lighting** HP 115V/60Hz Voltage 16.5 **Amps NEMA** Config. NEMA 5-20



- This product may exprose you to chemicals including Diisononyl Phthalate(DINP), which is known to the State of California to cause cancer. For more information go to www.P65War nings.ca.gov.

  Ce produit peut vous exposer á des agents chimiques incluant le Diisononyl Phthalate(DINP), reconnu par l'Esat de Californie comme causant le cancer, Pour de plus amples renseignements, consulter le site www.P65Warnings.ca.gov.











orders@blueairfse.com



1-886-677-8500

