# DESIGNER LINE REFRIGERATOR

### **Model: D1RNPT**

Natural Refrigerant R-290 Model



# 1-Section Pass-Thru Refrigerator



ENERGY STAR® Qualified Commercial Refrigerator

**D1RNPT** - Stainless steel front, aluminum end panels and interior **D1RNSAPT** - Stainless steel exterior, aluminum interior

D1RNSSPT - Stainless steel exterior and interior

Project Name:

Model Specified:

Location:

Item No: Quantity:

AIA #: SIS #:

# Continental

## **Options and Accessories**

(upcharge and lead times may apply)

Correctional Facility Options
One way security screws
Locking hasp (lock not included)
Stainless steel mesh cover
Coverless hinges
Special electrical requirements (consult factory)
Re-hinging of doors (consult factory)

Consult factory for other model configurations, options and accessories

# **Standard Model Features**

#### **REFRIGERATION SYSTEM**

Self contained, performance rated "plug" refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

#### **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty pilaster strips

Heavy duty, epoxy coated steel shelves

Adjustable 6" stainless steel legs

#### **MODEL FEATURES**

LED interior lighting

Electronic control, off cycle defrost

Top and side air distribution ducts

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.





APPROVAL:

# **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cubic feet)	21 (595 cu I)
Width, Overall (inches)	26 (660 mm)
Depth, Overall (inches) (including handles)	38 3/4 (984 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	79 (2007 mm)
Clear Door Width (inches)	19 3/8 (492 mm)
Clear Door Height (inches)	58 5/8 (1489 mm)
Height, Overall (inches) (including 6" legs)	83 1/4 (2115 mm)
Number of Doors	2
Number of Shelves	3
Shelf Area (square feet)	20.4 (1.9 sq m)
Tray Slide Capacity (2" centers)	24

#### **REFRIGERANT DATA**

Condensing Unit Size (H.P.)	1/4
Capacity (BTU per hour)*	1940

#### **ELECTRICAL DATA**

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	5.5 (3.9)
10 ft. Cord/Plug [attached] (International)	Yes (No)

#### **SHIPPING DATA**

Height - Crated (inches)	85 1/2 (2172 mm)
Width - Crated (inches)	31 5/8 (803 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	65 (1841 cu I)
Weight Std - Crated (pounds)	340 (155 kg)
Weight SS - Crated (pounds)	405 (184 kg)

\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)

# Continental® Refrigerator

**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









#### © Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

# **Model Plan Views**

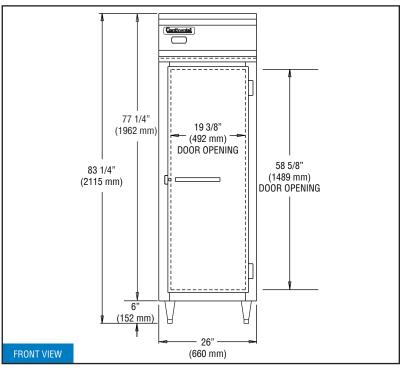

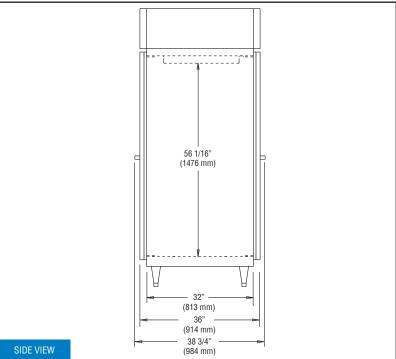

**IMPORTANT NOTE:** If the cabinet is located under a low ceiling, a <u>minimum</u> <u>clearance of 12" is required on top and 3" on sides.</u>