

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

DRAFT BEER EQUIPMENT-DIRECT DRAW DISPENSER

DD72HC Solid Door Dual Towers With Dual Faucets Hydrocarbon Series

MODEL: DD72HC-1-S



5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior stainless steel with galvanized steel back
- Top is made from heavy-duty stainless steel including drip tray
- Interior is galvanized steel on walls and ceiling, reinforced floor is heavy-duty stainless steel
- Full electronic control
- Dual towers with dual faucets
- 3-in-1 Draft solution uses a single stainless-steel tap to serve different beverages, such as wine, beer, and coffee (or other non-alcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling bacteria
- 3" Stainless steel insulated dispensing tower
- Drain tube located at bottom front of cooler for connection to floor drain
- Door locks
- Self-closing doors with 120° stay-open feature
- Magnetic gaskets provide positive door seal
- Field reversible doors (hinge kit not included)
- Compressor available on left or right, specify at time of unit order

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- · Stainless steel interior lining
- Stainless steel back
- Shelves
- Shelf clips
- Custom tower hole location
- · Drip tray location option
- Wine models
- Faucet locks
- Glass rinser
- Right or left hinged door
- 3"- 6" Casters or 6" black legs
- 1- 6 Tap tower
- 2, 3 & 4 way manifolds
- Dual tap placement option
- No draft/hole cover option
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- · Automatic, non-electric defrost
- Epoxy coated evaporator coil
- Maintains product temperatures between 36°F and 38°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




MODEL	DD72HC-1-S	
EXTERNAL DIMENSIONAL DATA		
Width Overall	72"	
Depth Overall	24 %"	
Height Overall (floor to top of tap)	51 ¼"	
Number of Doors	3	
Depth with Door Open 90°	42 %"	
Door Openings (in)	17 ¾" x 29 ¼"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	19.95	
Internal Width Useable (in)	60 1/4"	
Internal Depth Overall (in)	18 ¾"	
Internal Height Overall (in)	27 %"	
Number of 1/2 Kegs	3	
ELECTRICAL DATA		
Full Load Amperes	3.1	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)	1942	
Heat Rejection (BTU/Hr)	2913	
Charge (lbs/grams/ounces)	0.3086 / 140 / 4.94	
SHIPPING DATA		
Gross Weight - Crated	424 lbs	
Height - Crated	40"	
Width - Crated	75"	
Depth - Crated	26"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.



Bar Equipment-Direct Draw Beer Dispenser Model: DD72HC-1-S

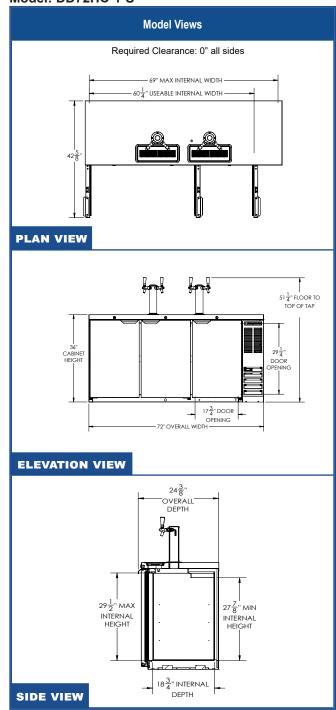







115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.