

Project: _____
 Model #: _____
 Item #: _____ Qty: _____
 Approval: _____

460 Southport Commerce Blvd.
 Spartanburg SC 29306
 Phone: 864-574-6004
 Toll Free: 1-888-532-2816
 sales@ojedausainc.com
 service@ojedausainc.com
 www.ojedausainc.com



GLASS DOOR FREEZER

FMH-27



Custom Graphics
 Available Upon Request

CARE FREE CONDENSER

The finless spiral condenser design prevents dust/dirt buildup allowing maximum long term efficiency.

R-290 REFRIGERANT

Equipped with R-290 refrigerant, an eco-friendly alternative that meets the EPA's environmental impact regulations.

STEEL CONSTRUCTION

Robust steel construction minimizes the use of plastic materials resulting in an environmentally friendly design.

ELECTRONIC CONTROL

The intelligent temperature control is programmed to ensure the correct operation of the equipment.

LED LIGHTING

LED provides long lasting energy efficient lighting with minimal heat output.

HOT GAS EVAPORATION

Hot gas heated drain pan for condensate evaporation that reduces the need of floor drains or electric heaters.

OPERATION TEMPERATURE

Low temp: -10°F to 0°F.

Dimensions			Shelves	HP	Voltage	NEMA Config	Amps	Crated Weight	Refrigerant
W	D	H							
30.2"	32.1"	80.8"	5	1/3	120	5-15P	5	350 lbs	R-290
767 mm	816 mm	2053 mm	Net Capacity (cf): 19		Energy Consumption: 7.86 kWh/24 h				

*Inches rounded up one decimal place. *Specifics may change without notification.

GLASS DOOR FREEZER

FMH-27

CABINET CONSTRUCTION

- High-density, CFC-Free, polyurethane insulation.
- Exterior: Galvanized metal cabinet with powder coated painted surface.
- Interior: Easy to clean pre-painted steel.

DOOR

- One (1) Triple pane glass door assembly.
- Self closing door.
- Recessed pocket handle.
- Magnetic door gasket.

SHELVING

- 5 adjustable, white powder-coated wired shelves.
- Dimensions per shelf: 23.9" W X 20.1" D.

OPERATING CONDITIONS

- The unit is best suited for an environment where temperatures remain below 85 °F and humidity does not exceed 55%.
- Areas with direct sunlight should also be avoided.

ELECTRICAL

- 110/120 standard volt system.



5-15P PLUG

LIGHTING

- LED interior lighting mounted on the door.

REFRIGERATION

- R-290 refrigerant.
- Maintenance free condenser.
- Hot gas heated condensation pan.
- Electronic temperature control.
- Electric Defrost.
- Easy to reach components for maintenance.

ACCESSORIES

- 6" stainless steel legs.
- 3" or 5" casters.
- Custom Graphics.

OPTIONAL ACCESSORIES


3"/5" Casters



6" Stainless Steel Legs



DIMENSIONAL DRAWING

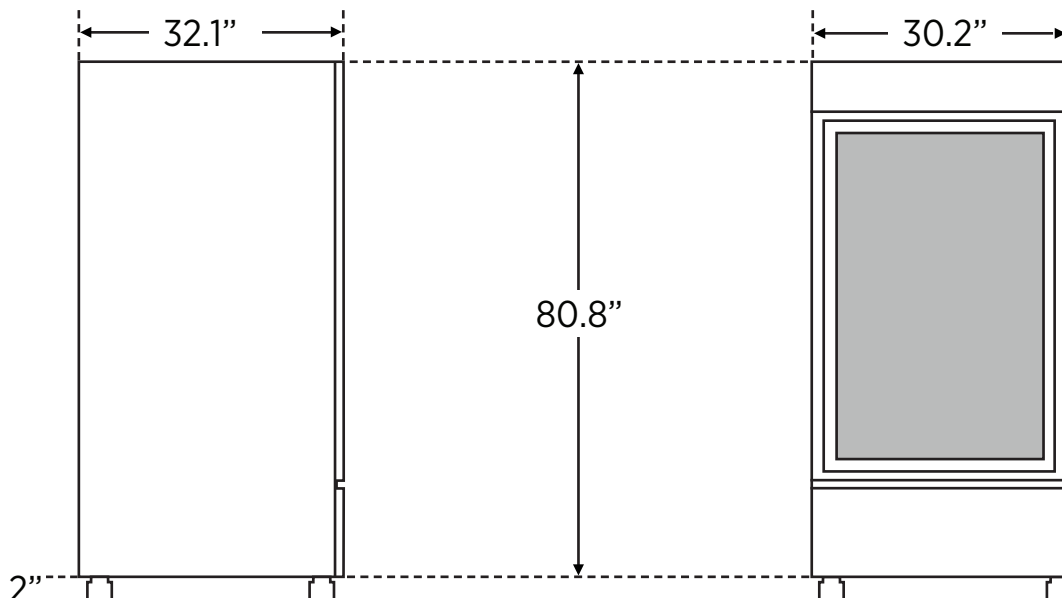

*INCHES ROUNDED UP ONE DECIMAL PLACE *SPECIFICS MAY CHANGE WITHOUT NOTIFICATION



AQ



MAFSi

www.ojedausa.com