



Reach-Ins **SOLID DOOR**

▣ ARR - 17

▣ ARF - 17

STANDARD FEATURES

⌘ DURABLE CONSTRUCTION

Our reach-in 17 cu. ft. unit boast a sturdy stainless steel floor, interior and exterior finish. Galvanized back panel providing strength and durability.

⌘ ERGONOMICALLY DESIGNED DOORS

Standard solid and glass doors come with easy grip handles and self closing/90 ° stay open door feature, working together for customer convenience.

⌘ MAGNETIC DOOR GASKET

Built of one piece, the gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the freezer gasket.

⌘ DIGITAL CONTROLLER

This temperature control system on refrigerators and freezers allows customers to keep the utmost food quality for a longer period of time.

⌘ HIGH DENSITY POLYURETHANE INSULATION

Ecomate® CFC-Free polyurethane insulation foamed in place including the mullion on double doors for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

⌘ EFFICIENT REFRIGERATION SYSTEM

Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators maintain temperature from 33° to 38°F and freezers maintain -7°F for storage of frozen foods.

⌘ BOTTOM MOUNT COMPRESSOR

Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.

⌘ DOORS

Field reversible door.

⌘ SHELVES

Adjustable epoxy coated wire shelves.

⌘ INCANDESCENT LIGHT & SWIVEL CASTERS

Interior incandescent light and 4" diameter swivel casters, front two with brakes.



ARR(F) - 17

OPTIONS & ACCESSORIES

Additional epoxy coated shelves / 2.5" Casters /
6" Adjustable stainless steel legs / 220V-50 cycles- 1 phase




ISO 9001


MODEL	DOORS	CAPACITY (Cu.Ft)	SHELVES	AMPS	HP	VOLTAGE	NEMA PLUG	Cord Length	Cabinet Dimensions			Shipping	
									L"	D"	H"	Wt. lbs.	Cubes
REFRIGERATORS													
ARR-17	1	17	3	5.2	1/4	115/60/1	5-15P	8'	27	26	72	240	37
ARF-17	1	17	3	8.5	3/4	115/60/1	5-15P	8'	27	26	72	240	37

* Height does not include 5" overall for casters.



ARR(F)-17 Front

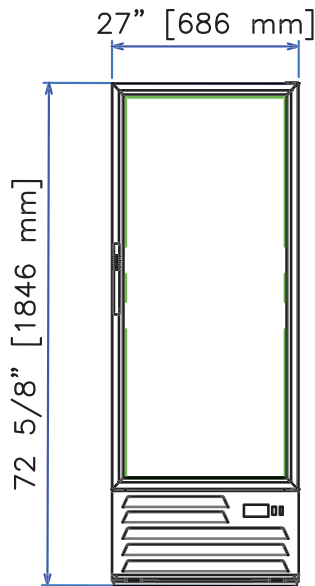

ARR(F)-17 Side

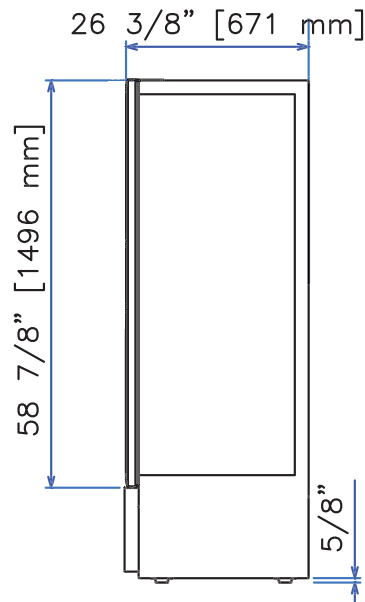

ARR(F)-17 Top

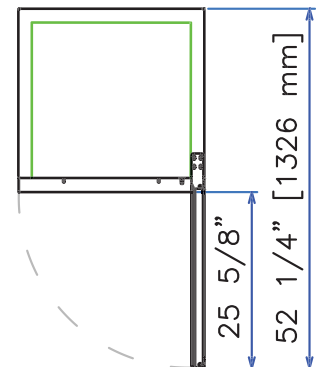

* Specifications

④ CONSTRUCTION

- Our reach-in 17 cu. ft. unit boast a sturdy stainless steel floor, interior and exterior finish. Galvanized back panel providing strength and durability.
- Solid door units come with interior incandescent and all units have 4" diameter swivel casters, front two with brakera.

④ DOORS & SHELVES

- Built of one piece, the gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the freezers gasket.
- 3 Adjustable epoxy coated wire shelves per unit.

④ REFRIGERATION SYSTEM

- Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators maintain temperature from 33° to 38°F and freezers maintain -7°F for storage of frozen foods.
- Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.
- Large fan motor and fan blades for better air circulation.
- Digital temperature control system on this 17 cu. ft refrigerator allows customers to keep the utmost food quality for a longer period of time.
- Ecomate® CFC-Free polyurethane insulation foamed in place including the mullion on double doors for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

④ ELECTRICAL

- The whole unit us completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50Hz/1ph available from factory.

④ WARRANTY

Continental USA & Canada:

- **One year:** Labor and parts warranty.
- **Five year:** Compressor warranty.
- **International:** One year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.