

SPIKA NG 230

115 V / 60 Hz

SELF-CONTAINED ICE CUBE MACHINE

FEATURES

- ▶ PRODUCES FULL DICE ICE CUBES OR HALF DICE ICE CUBES.
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME.
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV.
- ▶ SMART FRONT VENTILATION SYSTEM, (SFVS) ALLOWS BUILT-IN INSTALLATION OF THE UNIT.
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALCLIN OR SIMILAR) WITHOUT COOLING.
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER.
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY.
- ▶ ELECTRONIC CONTROL THAT ENHANCES THE PERFORMANCE OF THE MACHINE AND ALLOWS IT TO ADAPT TO EXTREME CLIMATES.
- ▶ NATURAL GAS R290 WITH VERY LOW GLOBAL WARMING POTENTIAL WHICH ALSO REDUCES THE ENERGY CONSUMPTION.
- ▶ LED ON/OFF SWITCH / PCB MOUNTED AT THE BOTTOM.
- ▶ TROPICALIZED MACHINES (T CLASS) / STAINLESS STEEL ADJUSTABLE LEGS.



		 70°F/20°C	 50°F/10°C	 90°F/32°C	 70°F/21°C	 lbs (Kg)	 in (mm)	 in (mm)	 SPIKA HALF DICE 0.9" (W) x 0.43" (D) x 1.02" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions
SPIKA NG 230 A		223 (101)	157 (71)	77 (35)	Width 25.99"(660) Depth 27.56"(700) Height* 32.76"(832)	Width 29.14"(740) Depth 28.35"(720) Height 37.6"(955)	 SPIKA FULL DICE 1.02" (W) x 0.9" (D) x 1.02" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions		
SPIKA NG 230 W		-	-						

* WITH LEGS 39"

SPIKA HALF DICE
0.9" (W) x 0.43" (D) x 1.02" (H)
23 mm (W) x 11 mm (D) x 26 mm (H)
Average dimensions

SPIKA FULL DICE
1.02" (W) x 0.9" (D) x 1.02" (H)
26 mm (W) x 23 mm (D) x 26 mm (H)
Average dimensions

ACCESSORIES

INCLUDED



6" HEIGHT ADJUSTABLE LEG KIT



SCOOP



10" FILTER
ANTI-LIMESCALE + ANTI-CHLORINE
CS-101 K



10" REPLACEMENT CARTRIDGE
ANTI-LIMESCALE + ANTI-CHLORINE
CS10




SCALE KLEEN


TECHNICAL SCHEME

SPIKA NG 230


SIDE VIEW

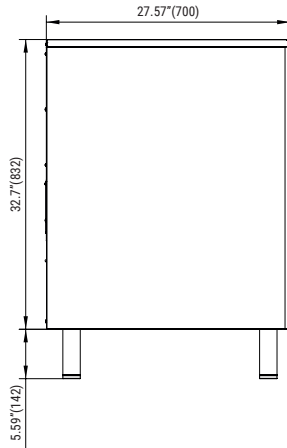

FRONTAL VIEW

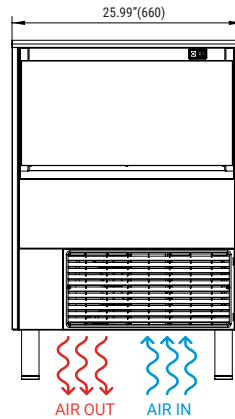

REAR VIEW

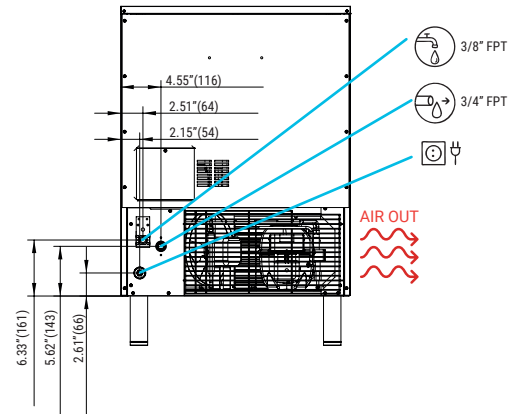

* All dimensions in inches (and mm)

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

±10% V

41°F/109°F

41°F/95°F

14,5 psi (1 bar) /87 psi(6 bar)

120/240 Ice cubes/cycle

	V	Hz	ph
	115	60	1N

	FULL DICE				
	SPIKA NG 230 AIR COOLED				
	50° 10°	60° 15°	70° 21°	86° 30°	
50° 10°	229	209	192	179	
68° 20°	225	203	185	168	
90° 32°	189	168	157	134	
109° 43°	159	137	115	93	

	FULL DICE				
	SPIKA NG 230 WATER COOLED				
	50° 10°	60° 15°	70° 21°	86° 30°	
50° 10°	-	-	-	-	
68° 21°	-	-	-	-	
90° 32°	-	-	-	-	
109° 43°	-	-	-	-	

MODELS

SPIKA NG 230 A

SPIKA NG 230 W

	ASHRAE CONDITIONS (BTu/h)	(W)	(W) 109°F	(AWG/mm ²)	(n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal 100lbs (l/h)	HEAT REJECTED (BTu/h)	(W)	(lbs)	(lbs)
SPIKA NG 230 A	4,087	1,197	414	16/1.5	3	16	5.9	3	2,806	822	141	167,5
SPIKA NG 230 W	-	-	-	-	-	-	-	-	-	-	-	-



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS
ON COMPRESSOR &
EVAPORATOR
Read our warranty policy
to know more about
limitations and exclusions



VERTICAL SYSTEM