

- ▣ APTS-27-8
- ▣ APTS-48-12
- ▣ APTS-60-16
- ▣ APTS-72-18

## ⌘ DURABLE STAINLESS STEEL

Our prep tables boast a sturdy stainless steel exterior and interior finish and galvanized back panel providing strength and durability.

## ⌘ ERGONOMICALLY DESIGNED SOLID DOORS

Standard doors come with easy grip handles and self closing/120 ° stay open door feature, working together for customer convenience.

## ⌘ MAGNETIC DOOR GASKET

Built of one piece, the gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the gasket.

## ⌘ EFFICIENT REFRIGERATION SYSTEM

Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators maintain temperature from 33°F to 41°F. Forced air design underneath pans to keep products fresh.

## ⌘ FRONT BREATHING

Allows unrestricted placement of the unit.

## ⌘ HIGH DENSITY POLYURETHANE INSULATION

2" Ecomate® CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

## ⌘ INSULATED LIDS

Removable insulated lids keep food fresh and cold by reducing condensation.

## ⌘ REVERSIBLE & EASY CLEANING CUTTING BOARD

The full length removable white polyethylene cutting board provides a comfortable 10" operation space.

## ⌘ STANDARD WITH FULL SETS OF 1/6th PANS, 4" DEEP

It also accomodate 6" deep pans (except for APTS-27: has two 1/9th size pans).

## OPTIONS & ACCESSORIES

Additional epoxy coated shelves / 2.5" Casters /  
6" Adjustable stainless steel legs / 220V-50 cycles- 1 phase

APTS-27-8



APTS-60-16



APTS-72-18




ISO 9001

| MODEL        | DOORS | TOP PANS | SHLVS. | AMPS | HP  | VOLTAGE  | NEMA PLUG | CORD LENGHT | CABINET L | DIMENSIONS D* | H** | SHIPPING Wt. | Cubes |
|--------------|-------|----------|--------|------|-----|----------|-----------|-------------|-----------|---------------|-----|--------------|-------|
| REFRIGERATOR |       |          |        |      |     |          |           |             |           |               |     |              |       |
| APTS-27-8    | 1     | 8        | 1      | 2.7  | 1/6 | 115/60/1 | 5-15P     | 8'          | 27"       | 30"           | 38" | 188          | 33    |
| APTS-48-12   | 2     | 12       | 2      | 5.4  | 1/4 | 115/60/1 | 5-15P     | 8'          | 48"       | 30"           | 38" | 280          | 55    |
| APTS-60-16   | 2     | 16       | 2      | 6.7  | 1/3 | 115/60/1 | 5-15P     | 8'          | 60"       | 30"           | 38" | 320          | 68    |
| APTS-72-18   | 3     | 18       | 3      | 6.7  | 1/3 | 115/60/1 | 5-15P     | 8'          | 72"       | 30"           | 38" | 370          | 81    |


\* Depth does not include 1" rear bumper

\*\*Height does not include 5" overall for casters


APTS-27-8 Top

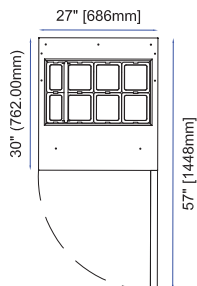


APTS-48-12 Top

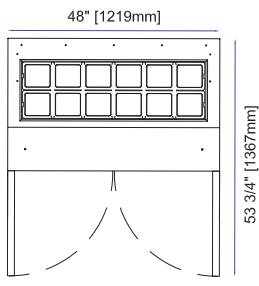


APTS-60-16 Top

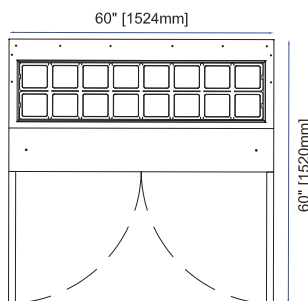


APTS-72-18 Top

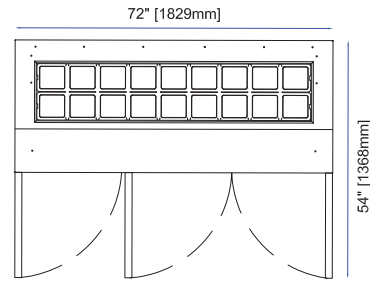


APTS-27-8 Front




APTS-48-12 Front




APTS-60-16 Front

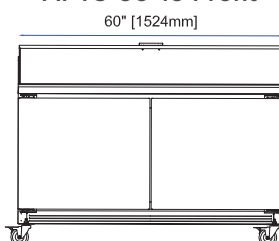

APTS-72-18 Front

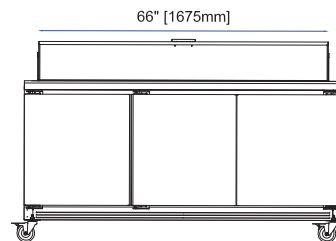


APTS-Common View

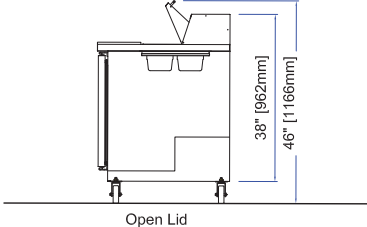

Open Lid

APTS-Common View

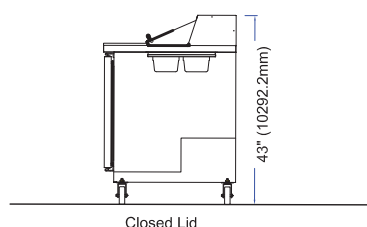

Closed Lid

## \* Specifications



ISO 9001

### ④ CABINET CONSTRUCTION

- EXTERIOR: Stainless steel, galvanized steel back.
- INTERIOR: Stainless steel.
- CABINET & DOOR : Entire foamed-in-place high-density, Ecomate® CFC-free, polyurethane insulation. Coved corner floor to meet NSF requirements.
- Casters: 4" Diameter swivel casters, front two with brakes.
- SHELVES: 1 Adjustable epoxy coated wire shelves per door.

### ④ DOORS

- Stainless steel exterior with ABS interior liner.
- One piece constructions magnetic gasket, removable without tools for easy cleaning.
- Self-closing doors with 120° stay open feature and recessed handles for convenient loading and unloading.

### ④ REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- R-134 A holding temperature at 33°F to 41°F Refrigerators
- Self-contained capillary tube system using environmentally-friendly and CFC-free refrigerant.
- Front breathing allows unrestricted placement of the unit.
- Large fan motor and fan blades for better air circulation
- Self contained system, no plumbing necessary

### ④ ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V / 50Hz / 1Ph available from factory.

### ④ WARRANTY

Continental US & Canada :

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International:** one year parts only.

\* Asber's specification are subject to change without notice as we continue to make product improvements.