



Reach-Ins

SOLID
DOOR

■ UCRR-17

■ UCRF-17

STANDARD FEATURES

• DURABLE CONSTRUCTION

Our reach-in boast a sturdy stainless steel interior and exterior finish and galvanized back panel providing strength and durability.

• ERGONOMICALLY DESIGNED SOLID DOORS

Standard solid and glass doors come with easy grip handles and self closing/90 ° stay open door feature, working together for customer convenience.

• MAGNETIC DOOR GASKET

Built of one piece, the gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the gasket.

• DIGITAL CONTROLLER

This temperature control system on refrigerators and freezers allows customers to keep the utmost food quality for a longer period of time.

• EFFICIENT REFRIGERATION SYSTEM

Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators maintain temperature from 33° to 38°F , 3 door refrigerator is R-404A. R-404A Freezers maintain temperature at -10°F, for single door, double and triple door -8°F.

• EFFICIENT REFRIGERATION SYSTEM

2-3/8" Ecomate® CFC-Free polyurethane insulation foamed in place including the mullion on double doors for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

• ALL BASIC PAN SIZES ACCEPTED, INCLUDING 18" X 26"

• BOTTOM MOUNT COMPRESSOR

Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.

• DUAL PANE GLASS DOORS

"G" model units come with dual pane glass doors with aluminium frames and LED interior lights for better operation and efficiency.

• INCANDESCENT LIGHT & SWIVEL CASTERS

Solid door units come with interior incandescent and all units have 4"



UCRR(F)-17

OPTIONS & ACCESSORIES

Additional epoxy coated shelves / 2.5" Casters / Factory reverse door hinging / 6" Adjustable stainless steel legs / 220V-50Hz-1Phase




ISO -9001


Model	Doors	Capacity Cu.Ft	Shlvs	Amps	HP	Volts	Nema Plug	Cord Length	Cabinet Dimensions			Shipping	
									W	D	H*	Wt.	Cubes
REFRIGERATOR													
UCRR-17	1	17	3	5.2	1/4	115/60/1	5-15P	8'	27"	26"	72"	240	37
FREEZER													
UCRF-17	1	17	3	8.5	3/4	115/60/1	5-15P	8'	27"	26"	72"	240	37

*Height does not include 5" overall for casters


UCRR(F)-17 Front View

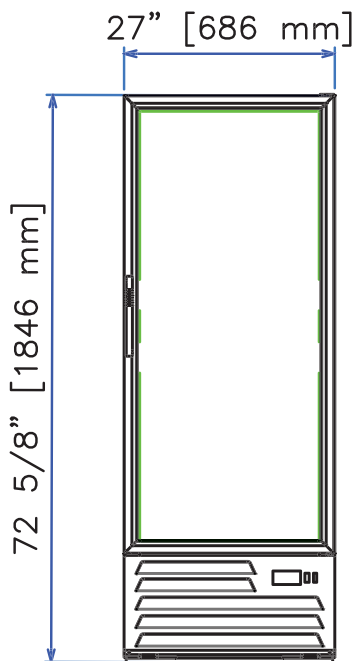

UCRR(F)-17 Side View

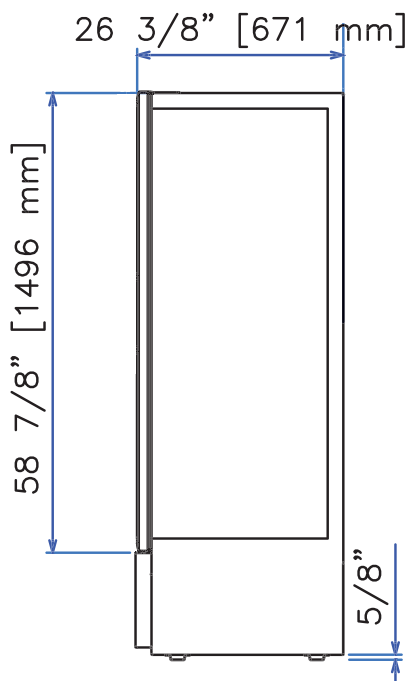

UCRR(F)-17 Top View

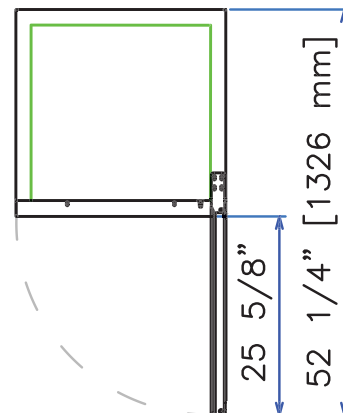

* Specifications



ISO-9001

■ CABINET CONSTRUCTION

- EXTERIOR: Stainless steel, galvanized steel back.
- INTERIOR: Stainless steel.
- CABINET & DOOR : entire foamed-in-place high-density, CFC-free, polyurethane insulation. Coved corner floor to meet NSF requirements.
- CASTERS: 4" Diameter swivel casters, front with brakes.
- SHELVES: 3 Adjustable epoxy coated wire shelves per door.

■ DOORS

- Solid doors have stainless steel front and interior. "G" glass door models are dual pane with aluminium frame.
- Doors in step design gives added protection to the gasket.
- GASKETS: One piece construction magnetic gasket, removable without tools for easy cleaning.
- CLOSING SYSTEM: Self-closing doors with 90° stay open feature for convenient loading and unloading.

■ REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- R-134A holding temperature at 33°F to 38°F Refrigerators. R-404A for 3 door Refrigerator.
- R-404A holding temperature at -10°F Freezers for single doors and -8°F on double and triple doors.
- Self-contained capillary tube system using environmentally friendly refrigerant Ecomate® (CFC free).

- Bottom mount compressor with service friendly rail system.
- Evaporator coil is mounted in the rear of the unit with full accessibility from the back.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing necessary.

■ OTHERS

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V / 50Hz / 1Ph available from factory.

■ WARRANTY

- 1 Year parts and labor warranty.
- 5 Years warranty on compressor.

* Specification are subject to change without notice as we continue to make product improvements