



STANDARD FEATURES

⌘ DURABLE STAINLESS STEEL

Our undercounters boast a sturdy stainless steel exterior and interior finish and galvanized back panel providing strength and durability.

⌘ ERGONOMICALLY DESIGNED SOLID DOORS

Standard doors come with easy grip handles and self closing/120° stay open door feature, working together for customer convenience while ABS door liner provides thermal efficiency.

⌘ MAGNETIC DOOR GASKET

Built of one piece, the gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the gasket.

⌘ EFFICIENT REFRIGERATION SYSTEM

Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators maintain temperature from 33° to 38°F and R-404A Freezers maintain temperature at -8°F. "HC" Freezer models use R-290.

⌘ FRONT BREATHING

Allows unrestricted placement of the unit.

⌘ HIGH DENSITY POLYURETHANE INSULATION

Ecomate® CFC-free polyurethane insulation designed to provide extra strength and energy efficiency, friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

⌘ COVED CORNERS

Inside the cabinet to meet NSF requirements.

⌘ 2 ADJUSTABLE WIRE SHELVES PER DOOR

Heavy duty, epoxy coated.

OPTIONS & ACCESSORIES

Additional epoxy coated shelves / 2.5" Casters /
6" Adjustable stainless steel legs / Factory reverse door hinging /
220V-50 cycles- 1 phase

Under Counters

REFRIGERATORS & FREEZERS

❑ AUTR-27

❑ AUTR-48

❑ AUTR-60

❑ AUTF-27-HC

❑ AUTF-48-HC

❑ AUTR-72



AUTR(F)-27



AUTR-60



AUTR-72




ISO 9001

MODEL	DOORS	CAPACITY (Cu.Ft)	SHLVs.	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGHT	CABINET L	DIMENSIONS D*	H**	SHIPPING Wt.	Cubes
REFRIGERATOR													
AUTR-27	1	6.1	2	2.7	1/6	115/60/1	5-15P	8'	27"	30"	31"	174	21
AUTR-48	2	11.8	4	5.4	1/4	115/60/1	5-15P	8'	48"	30"	31"	260	35
AUTR-60	2	15.0	4	6.7	1/3	115/60/1	5-15P	8'	60"	30"	31"	301	47
AUTR-72	3	18.2	6	6.7	1/3	115/60/1	5-15P	8'	72"	30"	31"	342	56
FREEZER													
AUTF-27-HC	1	6.1	2	8.2	3/4	115/60/1	5-15P	8'	27"	30"	31"	185	21
AUTF-48-HC	2	11.8	4	8.5	3/4	115/60/1	5-15P	8'	48"	30"	31"	319	35

* Depth does not include 1" rear bumper


**Height does not include 5" overall for casters

AUTR-27 Top




AUTR-27 Front

AUTR-48 Top




AUTR-48 Front

AUTR-60 Top




AUTR-60 Front





AUTR-72 Top

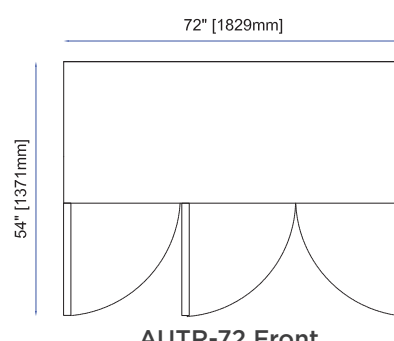


AUTR-72 Front



Side Common view

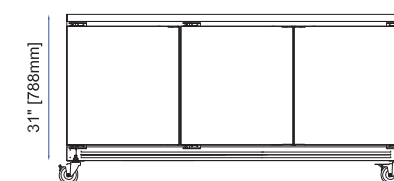

* Specifications



④ CABINET CONSTRUCTION

- EXTERIOR: Stainless steel, galvanized steel back.
- INTERIOR: Stainless steel.
- CABINET & DOOR : Entire foamed-in-place high-density, CFC-free, polyurethane insulation. Coved corner floor to meet NSF requirements.
- CASTERS: 4" Diameter swivel casters, front two with breaks.
- SHELVES: 2 Adjustable heavy duty epoxy coated wire shelves per door.

④ DOORS

- Stainless steel exterior with ABS interior liner.
- One piece constructions magnetic gasket, removable without tools for easy cleaning.
- CLOSING SYSTEM: Self-closing doors with 120° stay open feature and recessed handles for convenient loading and unloading.

④ REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- R-134A holding temperature at 33°F to 38°F Refrigerators. R-404A holding temperature at -10°F Freezers. "HC" models use R-290.
- Self-contained capillary tube system using environmentally friendly refrigerant Ecomate® (CFC free).
- Front breathing allows unrestricted placement of the unit.
- Reinforced condensate system, automatic defrost on refrigerators with electronic control for freezers.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing necessary.
- Access for the condensating unit behind the front grill, slides out for easy cleaning and maintenance.

④ ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50 Hz/ 1 Ph available from factory.

④ WARRANTY

Continental USA & Canada:

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International:** one year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.